

Accept the Connection Invitation in Script Mode for Jira On-premise

Last Modified on 12/08/2022 6:49 am EST


To accept the Connection invitation you need an **Invitation Code**. The **Invitation Code** includes **pre-populated** Connection details such as Connection name, instance short names, and Destination instance URL.

You are only required to finish the configuration by accepting the invitation.


Accept the Connection Invitation in Script Mode from Jira On-premise

1. Navigate to the **Connections** tab in the Exalate console.

Click **Settings** → **Apps** & click **Connections** under the **Exalate** menu.

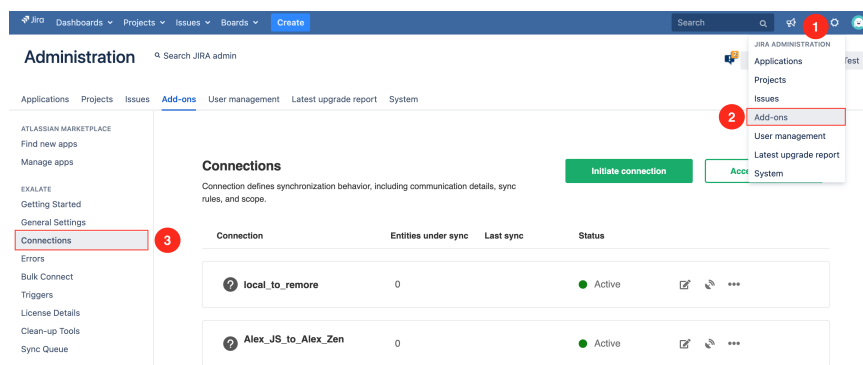


2. Click **Accept the invitation**.

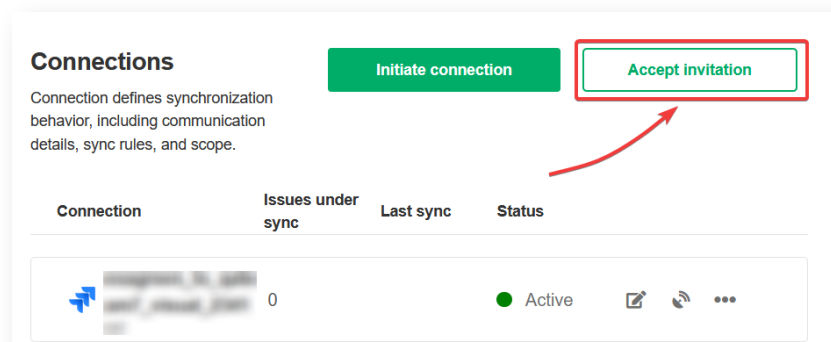

3. Paste the invitation code.


Paste the invitation code that you received from the other side.

And click **Next**.

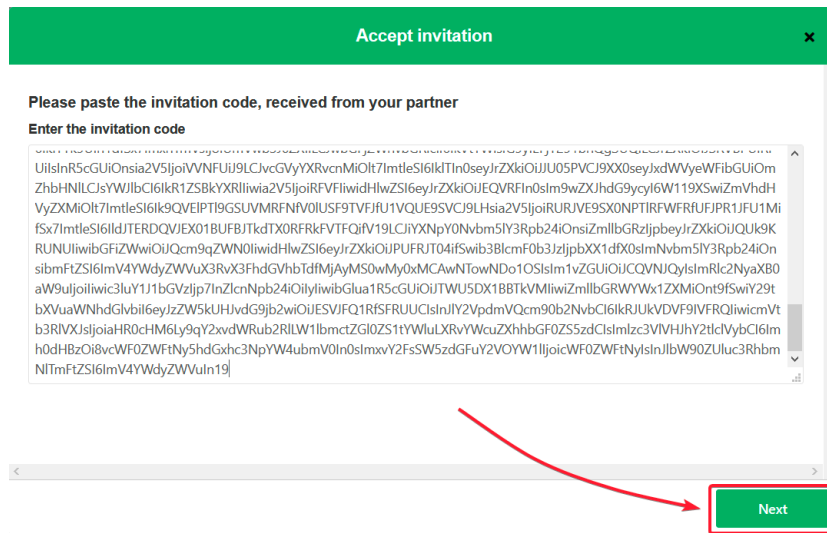


8. Select a project where you would like to sync issues received from the other side.

And click **Confirm**.

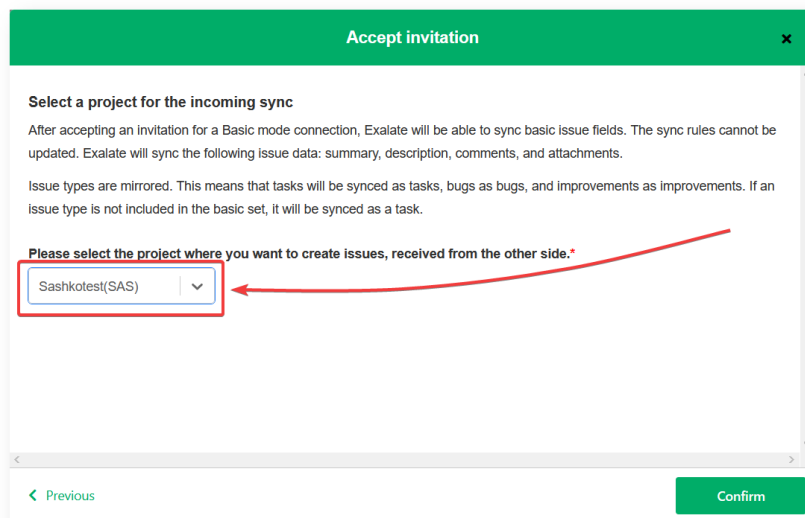

Congratulations! The connection is set up.

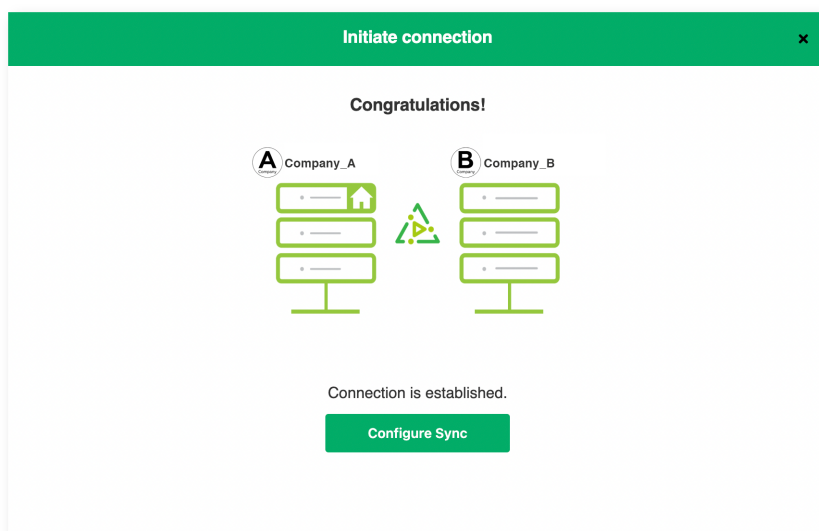

What's Next?

After accepting the connection invitation proceed to [configure the connection](#). Remember, with Exalate you need to set up the configuration for both integrating sides independently, depending on your integration requirements.

ON THIS PAGE

Product

[About Us](#) 

[Accept the Connection Invitation in Script Mode from](#)

[Release History](#)

[Jira On-premise](#)

[Glossary](#)

[What's Next?](#)

[Security](#)

[Pricing and Licensing](#)

Resources

[Academy](#) 

[Blog](#) 

[YouTube Channel](#) 

[Ebooks](#) 

Still need help?

[Join our Community](#) 

[Visit our Service Desk](#) 

[Find a Partner](#) 