

# Approving Node Import Requests in Exalate Classic Console

Last Modified on 12/18/2025 4:11 am EST


When a user in the new Exalate console requests to import a node, the Exalate Classic Console administrator must approve or decline the request within the **Exalate Classic App**.

## Receiving an Import Request

Once a request is sent from New Exalate, the node administrator will receive a **notification** in the UI.

To review the request:

1. Open the **Exalate application**.
2. Navigate to the **New Exalate** tab.
3. Select the **Requests** section.
4. Locate the request, which displays the **username** of the requester and the **workspace name** where the node is being imported.

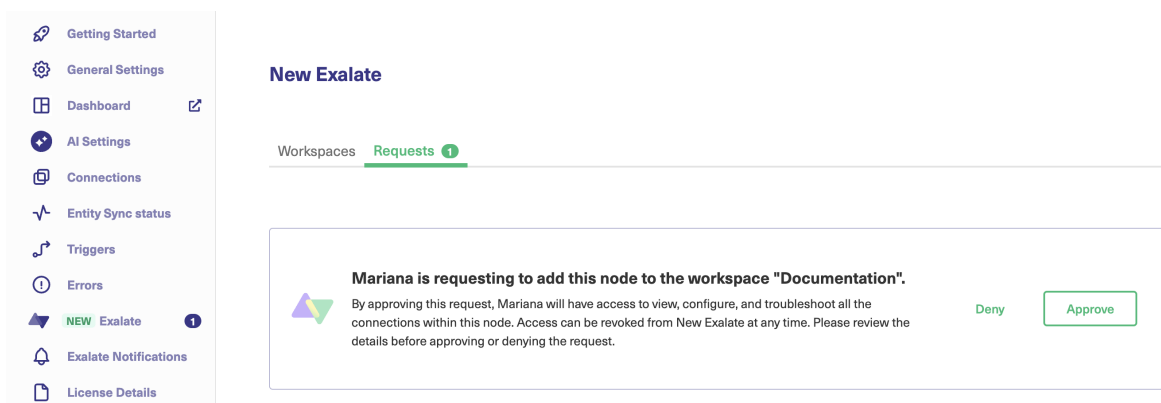

## Approving or Denying a Request

- Click **Approve** to allow the node to be imported into the specified workspace.
- Click **Deny** to reject the request.

**Important:** Once a request is **denied**, the notification will disappear from Exalate. If a request was denied by mistake, a new request must be sent from New Exalate for approval.

## What Happens After Approval?

Once an Exalate admin **approves** a node import request:

- The node is added to the specified New Exalate **workspace**.
- Any connections involving this node can now be **managed via New Exalate**. This includes:
  - Viewing and configuring connection sync rules.
  - Changing connection status.
  - Troubleshooting.
- The access can be revoked from New Exalate UI at any time.

## Product ON THIS PAGE

[About Us](#) 

[Receiving an Import Request](#)

[Glossary](#) 

[Approving or Denying a Request](#)

[API Reference](#) 

[What Happens After Approval?](#)

[Security](#)

[Pricing and Licensing](#) 

### Resources

[Subscribe for a weekly Exalate hack](#) 

[Academy](#) 

[Blog](#) 

[YouTube Channel](#) 

[Ebooks](#) 

### Still need help?

[Join our Community](#) 

[Visit our Service Desk](#) 

[Find a Partner](#) 