


Accept the Connection Invitation in Script Mode for Xurrent

Last Modified on 12/09/2025 2:51 am EST

Note: To accept the Connection invitation you need an **Invitation Code**. The **Invitation Code** includes **pre-populated** Connection details such as Connection name, instance short names, and Destination instance URL. You are only required to finish the configuration by accepting the invitation.

Accept the Connection Invitation in Script Mode from Xurrent

1. Navigate to the **Connections** tab in the Exalate console.

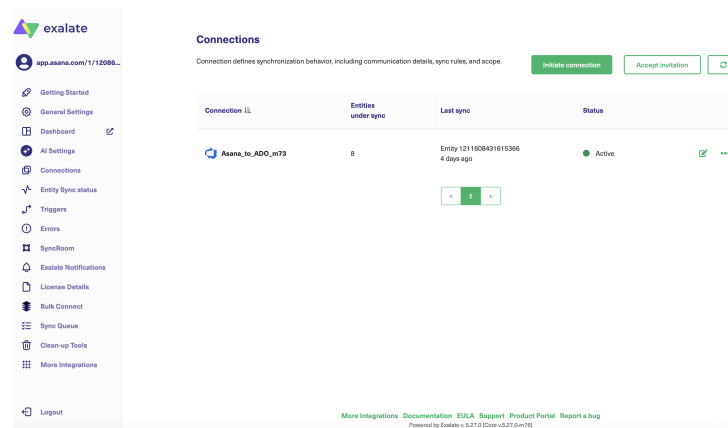

2. Click **Accept invitation**.

Connections

Connection defines synchronization behavior, including communication details, sync rules, and scope.

Initiate connection

Accept invitation

Refresh

3. Paste the invitation code and click **Next**

✕

Enter the invitation code

✕

[Find a Partner](#) 